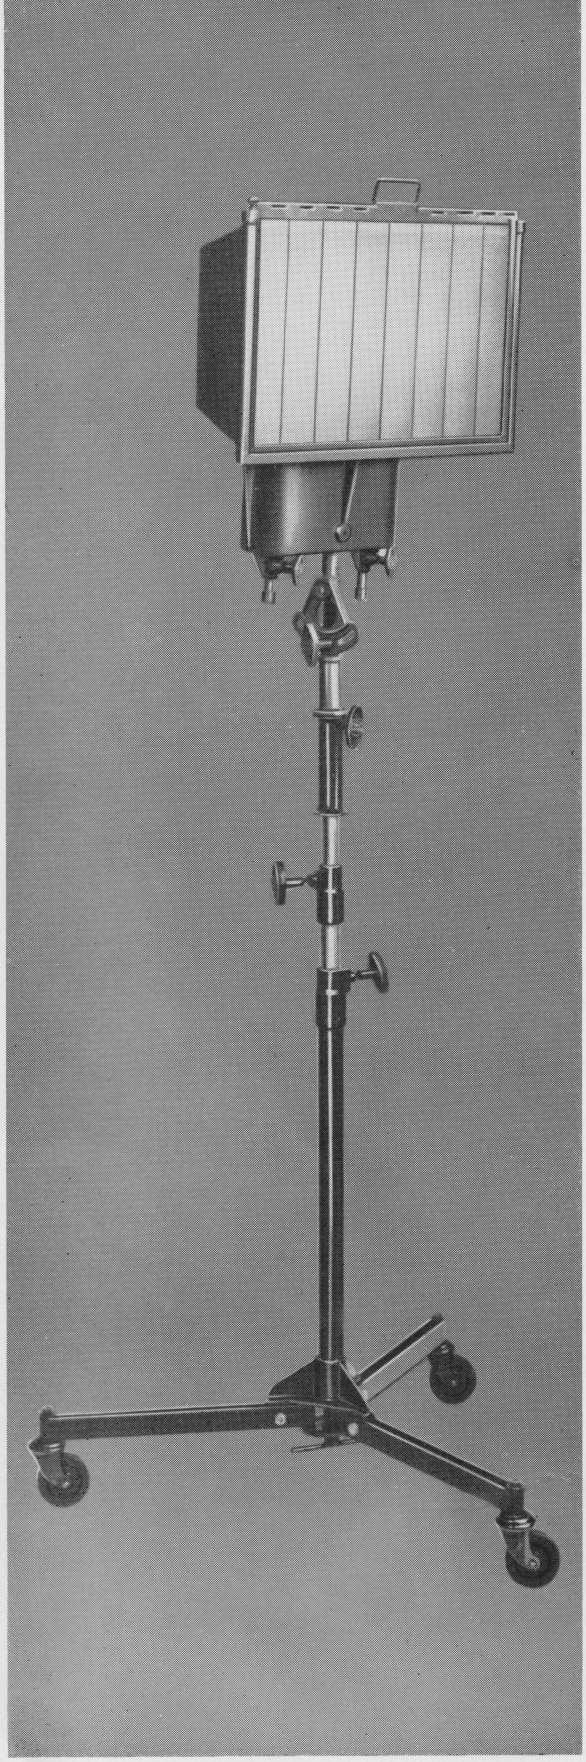

'LOLLO' M-R TYPE 5

'Lollo' M-R Type 5

A powerful soft flood. Provides for two bulbs, independently switched. Height of each socket adjustable, so that two bulbs of different filament heights can be used simultaneously.

SPECIFICATION

LAMPHEAD M-R Type 5

CONSTRUCTION	Double skin, sheet metal housing with cast light alloy fittings.
MOUNTING	Two-piece column with tilt control and $1\frac{1}{8}$ inches diameter spud.
REFLECTOR	Chromium plated.
DIFFUSER	Sheet metal frame, frosted glass screen.
SWITCHES	Two double pole, quick make and break toggle type mounted on lamphead.
CABLE	25 feet of 3-core rubber covered, attached to lamp.
SOCKETS	Giant Edison screw.
BULB TYPE AND RATING	(not included in price of lamp). Internal Silica-coated or Photoflood. 500/750/1000 watt. 100/260 volt. Lamp Ref. I.S.C. 500/750/1000 watt. 100/260 volt. Lamp Ref. G.L.S. 1000 watt. 115 or 230 volt. Lamp Ref. PP/3. 1000 watt. 115 or 230 volt. Lamp Ref. Photopearl.

STAND M-R Type S.2000 (not included in price of lamp).

Double lift, folding type.

CONSTRUCTION	Leg members and tubes of mild steel with non-ferrous metal fittings and 3 inch rubber-tyred castors.
SOCKET DIAMETER	$1\frac{1}{8}$ inches.

MOLE-RICHARDSON